



\*\*\* REDUCE TO 40' (12 m) O.C. ON CURVES WITH POSTED OR ADVISORY SPEED 45 M.P.H. (70 km/h) OR LESS.

## TWO-LANE/TWO-WAY

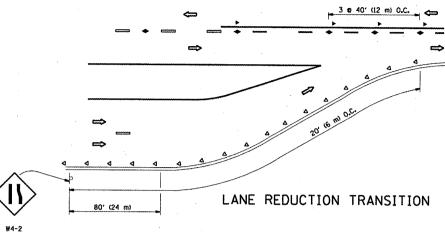

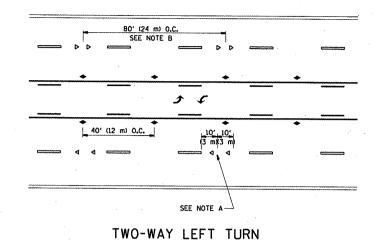

80' (24 m) 0.C.


SEE NOTE B

40' (12 m) 0.C.

G m)(3 m)

SEE NOTE A

MULTI-LANE/UNDIVIDED

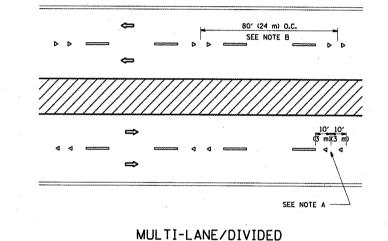

LANE MARKER NOTES

GENERAL NOTES

 MARKERS USED WITH DASHED LINES SHALL BE CENTERED IN THE GAP BETWEEN SEGMENTS.

2 TO 3 (50 TO 75) TOWARD TRAFFIC AS SHOWN.

A. USE DOUBLE LANE LINE MARKERS SPACED AS SHOWN.

B. REDUCE TO 40' (12 m) O.C. ON CURVES WHERE ADVISORY SPEEDS ARE 10 M.P.H (20 km/h) LOWER THAN POSTED SPEEDS.

2. MARKERS USED ADJACENT TO SOLID LINES SHALL BE OFFSET

3. MARKERS THROUGH TANGENTS LESS THAN 500' (150 m) IN LENGTH BETWEEN CURVES SHALL BE INSTALLED AT THE LESSER OF THE TWO CURVE SPACINGS.

## SYMBOLS

YELLOW STRIPE

WHITE STRIPE


◆ ONE~WAY AMBER MARKER

ONE-WAY CRYSTAL MARKER (W/O)

TWO-WAY AMBER MARKER

## DESIGN NOTES

- 1. DOUBLE LANE LINE MARKERS SHALL BE USED UNLESS SPECIFIED OTHERWISE.
- 2. EXCEPT AS SHOWN ON THE LANE REDUCTION TRANSITION AND FREEWAY EXIT RAMP DETAIL, MARKERS ARE NOT TO BE SPECIFIED ON RIGHT EDGE LINES.
- 3. THE EXACT MARKER LIMITS, SPACING, AND COLOR SHALL BE INCLUDED IN THE PLANS WHEN STANDARD SPECIFICATIONS ARE NOT BEING USED.
- 4. MARKERS SHOULD NOT BE USED ALONGSIDE CURBS EXCEPT FOR EXTREMELY SHORT SECTIONS OF CURBS WHERE NOT MORE THAN TWO MARKERS WOULD BE INVOLVED.

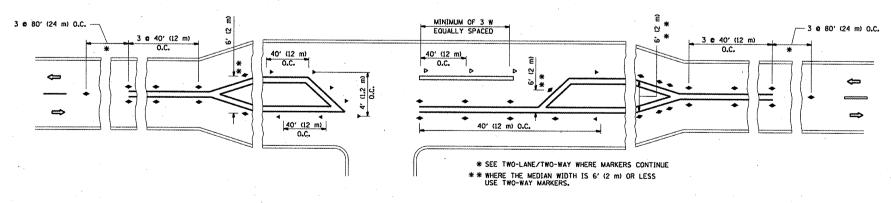

LEFT TURN

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TYPICAL APPLICATIONS

RAISED REFLECTIVE PAVEMENT MARKERS (SNOW-PLOW RESISTANT)

E: NONE | SHEET NO. 1 OF 1 SHEETS | STA TO STA

DistStd.dgn 10/11/2011 12:59:25 PM User≈velichkov

All dimensions are in inches (millimeters) unless otherwise shown.

SCALE: NONE SHEET NO. 1 OF 1 SHEETS STA. TO STA. FED. ROAD DIST. NO. 1